




KUMTEL®

Built-in & Cooktop Hob Catalogue

ELECTRIC BUILT-IN FEATURES

V3-02P

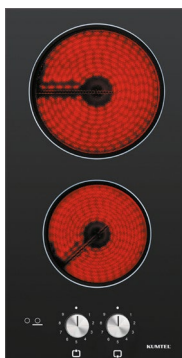


Main Features

Front Knob Control
9 Cooking Levels Per Zone
Front: 140 mm / 1200 W
Rear: 180 mm / 1800 W
On-off indicator light

Technical Features

Total Power: 3000 W
Product Dimensions: 29 x 52 cm

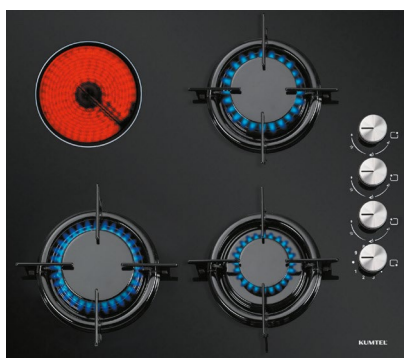


V6-31 PYF

Main Features

Side Knob Control
Gas Safety
Auto Ignition
Left Rear: 140 mm / 1200 W
Right Rear: 1,65 KW
Left Front: 2,20 KW
Right Front: 1,10 KW

Technical Features

Total Power: 1200 W
Product Dimensions: 52 x 59 cm

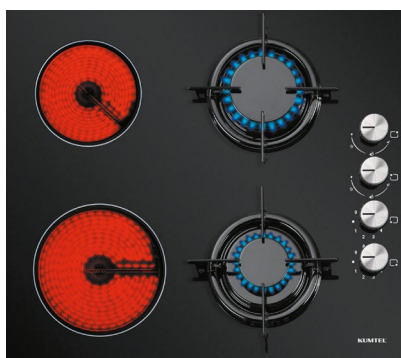


V6-22 PYF

Main Features

Side Knob Control
Gas Safety
Auto Ignition
Left Rear: 140 mm / 1200 W
Right Rear: 1,65 KW
Left Front: 180 mm / 1800 W
Right Front: 1,10 KW

Technical Features

Total Power: 3000 W
Product Dimensions: 52 x 59 cm

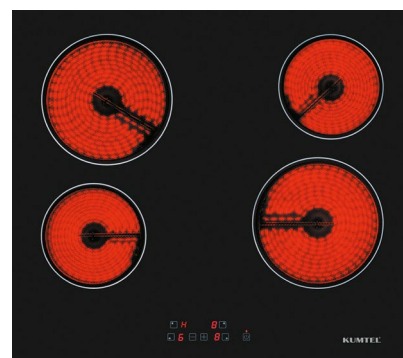

V6-04T





Main Features

Touch Digital Control
Left Front: 140 mm / 1200 W
Right Front: 180 mm / 1800 W
Left Rear: 180 mm / 1800 W
Right Rear: 140 mm / 1200 W

Technical Features

Total Power: 6000 W
Product Dimensions: 52 x 59 cm

ELECTRIC BUILT-IN SPECIFICATION



Model	V3-02 P	V6-31 PYF	V6-22 PYF	V6-04 T
Product Type	Built-in	Built-in	Built-in	Built-in
Location of Control Panel	Front	Side	Side	Front
Hobs Width (Cm)	30	60	60	60
Flame Failure Device (FFD)	-	Yes	Yes	-
Voltage	220-240	220-240	220-240	380
Frequency (Hz)	50 - 60	50 - 60	50 - 60	50 - 60
Ignition	-	Yes	Yes	-
Pan Support Type	-	Cast Iron - Enamelled	Cast Iron - Enamelled	-
Gas Type	-	LPG or NG	LPG or NG	-
Cooking Level	9	9 (Vitroceramic)	9 (Vitroceramic)	9
Hob Burner Configuration	2 Vitroceramic	1 Vitroceramic + 3 Gas	2 Vitroceramic + 2 Gas	4 Vitroceramic
Depth (Mm)	520	520	520	520
Width (Mm)	290	590	590	590
Height (Mm)	90	105	105	90
Weight (Kg)	4,5	9	9	8

GAS BUILT-IN FEATURES

C3-10 BTF




Main Features

Tempered Glass Surface
Tribble Burner
Gas Safety System
Auto Ignition

Technical Features

Tribble Burner: 1 x 3,60 KW
Product Dimensions: 29 x 52 cm

C3-20 BF

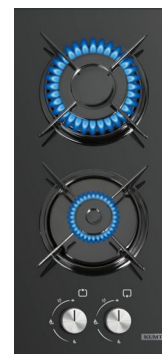


Main Features

Tempered Glass Surface
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions: 29 x 52 cm

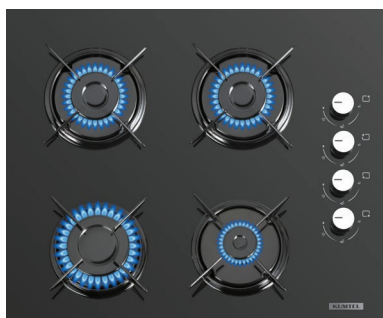


C6-40 BF (SIDE CONTROL)

Main Features

Tempered Glass Surface
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions: 52 x 60 cm

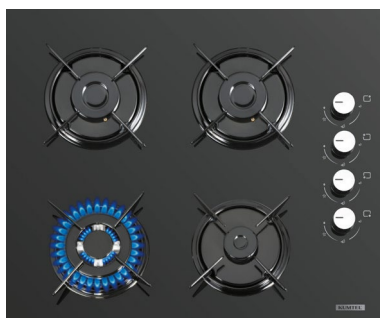


C6-40 BTF (SIDE CONTROL)

Main Features

Tempered Glass Surface
Tribble Burner
Gas Safety System
Auto Ignition

Technical Features

Tribble Burner: 1 x 3,60 KW
Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions: 52 x 60 cm

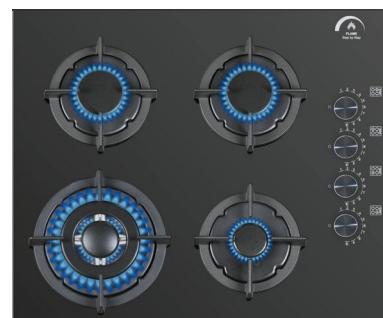

C6-40 BTF Platinum (SIDE CONTROL)

Main Features

Tempered Glass Surface
Tribble Burner
Cast Iron Pan Support
Step By Step 10 Leves Gas Adjustment
Gas Safety System
Auto Ignition

Technical Features

Tribble Burner: 1 x 3,60 KW
Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
*Auxiliary Burner: 1 x 1,10 KW
*Product Dimensions: 52 x 60 cm



C6-40 BF (FRONT CONTROL)

Main Features

Tempered Glass Surface
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions: 60 x 52 cm



C7-50 BTF

Main Features

Tempered Glass Surface
Tribble Burner
Gas Safety System
Auto Ignition

Technical Features

Tribble Burner: 1 x 3,60 KW
Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions: 52 x 75 cm



C9-50 BTF (FRONT CONTROL)

Main Features

Tempered Glass Surface
Tribble Burner
Gas Safety System
Auto Ignition

Technical Features

Tribble Burner: 1 x 3,60 KW
Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions: 52 x 90 cm



C9-50 BTF (SIDE CONTROL)

Main Features

Tempered Glass Surface
Tribble Burner
Gas Safety System
Auto Ignition

Technical Features

Tribble Burner: 1 x 3,60 KW
Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions: 52 x 90 cm



KO-410 BF

Main Features

Metal Body
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions: 50 x 58 cm



KO-412 BF

Main Features

Metal Body
Gas Safety System
3 Gas + 1 Hotplate
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 1 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Electric Hotplate: 1 x 1000 W
Product Dimensions: 50 x 58 cm



M6-40 BF Violet

Main Features

Metal Body
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions: 52 x 58 cm



M6-31 BF Violet

Main Features

Metal Body
3 Gas + 1 Hotplate
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 1 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Electric Hotplate: 1 x 1000 W
Product Dimensions: 52 x 58 cm



M6-22 BF Violet

Main Features

Metal Body
2 Gas + 2 Hotplate
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 1 x 1,65 KW
Electric Hotplate:
1 x 1000 W , 1 x 1500 W
Product Dimensions: 52 x 58 cm



M6-04

Main Features

Metal Body
4 Hotplate

Technical Features

Electric Hotplate: 2 x 1000 W
Electric Hotplate: 2 x 1500 W
Product Dimensions: 50 x 58 cm



KO-410 BF EKOL

Main Features

Front Knob Control
Metal Body
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions: 52 x 59 cm



M7-50 BF Flat

Main Features

Front Knob Control
Metal Body
Tribble Burner
Gas Safety System
Auto Ignition

Technical Features

Tribble Burner: 1 x 3,60 KW
Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions: 50 x 68,5 cm



M6-40 BF Nil (Rectangle)

Main Features

Front Knob Control
Metal Body
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions: 52 x 59 cm



M6-40 BF Nil (Round)

Main Features

Front Knob Control
Metal Body
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions: 52 x 59 cm



M6-31 BF Nil

Main Features

Front Knob Control
Metal Body
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 1 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Electric Hotplate: 1 x 1000 W
Product Dimensions: 52 x 59 cm



M6-22 BF Nil

Main Features

Front Knob Control
Metal Body
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 1 x 1,65 KW
Electric Hotplate: 2 x 1000 W
Product Dimensions: 52 x 59 cm



M6-04 Nil

Main Features


Front Knob Control
Metal Body

Technical Features

Electric Hotplate: 4 x 1000 W
Product Dimensions: 52 x 59 cm

KUMTEL®

BUILT-IN HOB SPECIFICATION



Model	C3-10 BTF	C3-20 BF	C6-40 BF	C6-40 BF
Product Type	Built-in	Built-in	Built-in	Built-in
Location of Control Panel	Front	Front	Front	Side
Hobs Width (Cm)	30	30	60	60
Flame Failure Device (FFD)	Yes	Yes	Yes	Yes
Voltage (v)	220-240	220-240	220-240	220-240
Frequency (Hz)	50 - 60	50 - 60	50 - 60	50 - 60
Ignition	Auto	Auto	Auto	Auto
Pan Support Type	Cast iron - Enamelled	Cast iron - Enamelled	Cast iron - Enamelled	Cast iron - Enamelled
Gas Type	LPG or NG	LPG or NG	LPG or NG	LPG or NG
Cooking Level	-	-	-	-
Hob Burner Configuration	1 Tribble	2 Gas	4 Gas	4 Gas
Depth (Mm)	520	520	520	520
Width (Mm)	290	290	600	600
Height (Mm)	105	105	105	105
Weight (Kg)	5,5	5,5	10	10



Model	C6-40 BTF	C6-40 BTF	C7-50 BTF	C9-50 BTF	C9-50 BTF
Product Type	Built-in	Built-in	Built-in	Built-in	Built-in
Location of Control Panel	Side	Side	Front	Front	Side
Hobs Width (Cm)	60	60	75	90	90
Flame Failure Device (FFD)	Yes	Yes	Yes	Yes	Yes
Voltage (v)	220-240	220-240	220-240	220-240	220-240
Frequency (Hz)	50 - 60	50 - 60	50 - 60	50 - 60	50 - 60
Ignition	Auto	Auto	Auto	Auto	Auto
Pan Support Type	Cast iron - Enamelled	Cast iron - Enamelled	Cast iron - Enamelled	Cast iron - Enamelled	Cast iron - Enamelled
Gas Type	LPG or NG	LPG or NG	LPG or NG	LPG or NG	LPG or NG
Cooking Level	-	10	-	-	-
Hob Burner Configuration	3 Gas 1 Tribble	3 Gas 1 Tribble	4 Gas 1 Tribble	4 Gas 1 Tribble	4 Gas 1 Tribble
Depth (Mm)	520	520	520	520	520
Width (Mm)	590	590	750	900	900
Height (Mm)	105	105	105	105	105
Weight (Kg)	11	12	14	17	17



Model	KO-410 BF	KO-412 BF	M6-40 BF Violet	M6-31 BF Violet	M6-22 BF Violet	M6-04
Product Type	Built-in	Built-in	Built-in	Built-in	Built-in	Built-in
Location of Control Panel	Side	Side	Side	Side	Side	Side
Hobs Width (cm)	60	60	60	60	60	60
Flame Failure Device (FFD)	Yes	Yes	Yes	Yes	Yes	-
Voltage (v)	220-240	220-240	220-240	220-240	220-240	220-240
Frequency (Hz)	50-60	50-60	50-60	50-60	50-60	50-60
Ignition	Auto	Auto	Auto	Auto	Auto	-
Pan Support Type	Cast iron - Enamelled	Cast iron - Enamelled	Cast iron - Enamelled	Cast iron - Enamelled	Cast iron - Enamelled	-
Gas Type	LPG or NG	LPG or NG	LPG or NG	LPG or NG	LPG or NG	-
Cooking Level	-	3 Level for Hotplate	-	3 Level for Hotplate	3 Level for Hotplate	3 Level for Hotplate
Hob Burner Configuration	4 Gas	3 Gas 1 Electric	4 Gas	3 Gas 1 Electric	2 Gas 2 Electric	4 Electric
Depth (Mm)	500	500	520	520	520	500
Width (Mm)	580	580	580	580	580	580
Height (Mm)	100	100	100	100	100	100
Weight (Kg)	6,4	7,5	6,4	7,5	8	8



Model	KO-410 BF Ekol	M6-40 BF Nil	M6-31 BF Nil	M6-22 BF Nil	M6-04 Nil	M7-50 BF Flat
Product Type	Built-in	Built-in	Built-in	Built-in	Built-in	Built-in
Location of Control Panel	Front	Front	Front	Front	Front	Front
Hobs Width (Cm)	60	60	60	60	60	75
Flame Failure Device (FFD)	Yes	Yes	Yes	Yes	-	Yes
Voltage (v)	220-240	220-240	220-240	220-240	220-240	220-240
Frequency (Hz)	50-60	50-60	50-60	50-60	50-60	50-60
Ignition	Auto	Auto	Auto	Auto	-	Auto
Pan Support Type	Cast iron - Enamelled	Cast iron - Enamelled (Rectangle of Round)	Cast iron - Enamelled (Rectangle of Round)	Cast iron - Enamelled (Rectangle of Round)	-	Cast iron - Enamelled
Gas Type	LPG or NG	LPG or NG	LPG or NG	LPG or NG	-	LPG or NG
Cooking Level	-	-	3 Level for Hotplate	3 Level for Hotplates	3 Level for Hotplates	-
Hob Burner Configuration	4 Gas	4 Gas	3 Gas + 1 Electric	2 Gas + 2 Electric	4 Electric	4 Gas + 1 Tribble
Depth (Mm)	520	520	520	520	520	500
Width (Mm)	590	590	590	590	590	685
Height (Mm)	105	100	100	100	100	80
Weight (Kg)	10	10	10	10	10	9,5

COUNTERTOP HOBS FEATURES



C3-10 TF

Main Features

Tempered Glass Surface
Tribble Burner
Gas Safety System
Auto Ignition

Technical Features

Tribble Burner: 1 x 3,60 KW
Product Dimensions:
29 x 52 cm



C3-20 F

Main Features

Tempered Glass Surface
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions:
29 x 52 cm



C6-40 F

Main Features

Tempered Glass Surface
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions:
52 x 60 cm



KO-102

Main Features

Metal Body
2 Gas Burner

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 1 x 1,65 KW
Product Dimensions:
32,5 x 60,5 cm
Painted or Enameled Options



KO-123

Main Features

Metal Body
3 Gas Burner

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 1 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions:
32,5 x 60,5 cm
Painted or Enameled Options



KO-104

Main Features

Metal Body
4 Gas Burner

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions:
50 x 52 cm
Painted or Enameled Options



V3-02 P

Main Features

Front Knob Control
9 Cooking Levels Per Zone
Front: 140 mm / 1200 W
Rear: 180 mm / 1800 W
On-off indicator light

Technical Features

Total Power: 3000 W
Product Dimensions:
29 x 52 cm



204 PUNTO

Main Features

Metal Body
4 Gas Burner

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions:
50 x 52 cm



KO-420 F

Main Features

Metal Body
Gas Safety System
Auto Ignition

Technical Features

Rapid Burner: 1 x 2,20 KW
Semi Rapid Burner: 2 x 1,65 KW
Auxiliary Burner: 1 x 1,10 KW
Product Dimensions:
50 x 58 cm



LX-7011

Main Features

Hotplate: 1500 W
Thermosat control
On-off indicator light

Technical Features

Product Dimensions:
26 x 28 cm



LX-7115

Main Features

Hotplate: 1500 W
Thermosat control
On-off indicator light

Technical Features

Product Dimensions
26 x 28 cm



LX-7021

Main Features

Big Hotplate: 1500 W
Small Hotplate: 1000 W
Thermosat control
On-off indicator light

Technical Features

Total Power: 2500 W
Product Dimensions:
28 x 50 cm



Head Office:

Buyuk Hendek Street
No:57 Şişhane / ISTANBUL
(+90) 212 292 2525

Factory:

Organize Sanayi Field
6. Street No: 42
Melikgazi / KAYSERİ
(+90) 352 321 1400